
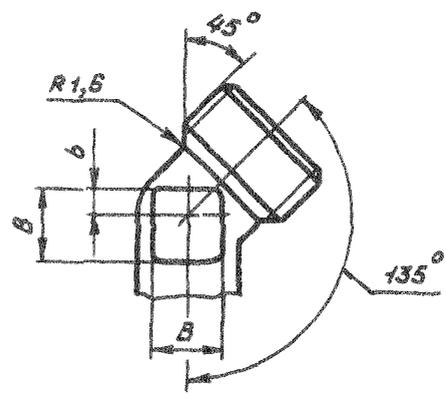


2. Конструкция и размеры ввертных угольников должны соответствовать указанным на чертеже и в таблице.

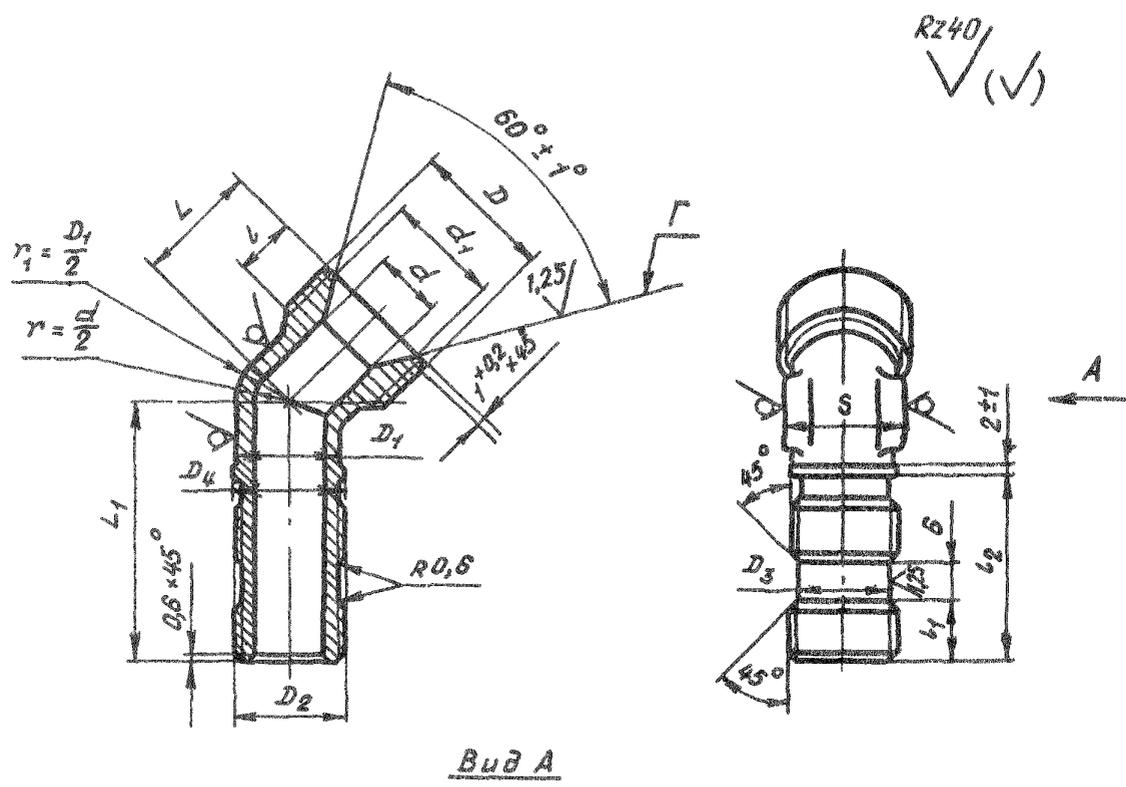

Изм. №	№ документа	1100	1	2	3
			№ изм.	№ документа	№ документа
			5681	6627	11776

Инв. № дубликата

Инв. № подлинника

1100

Лит.изм.

1

2

3

№ изв.

5681

6627

11776

Размеры, мм

Наружный диаметр трубы D_H	d	d_1 $\pm 0,2$	D	D_1	D_2	D_3 мм	D_4	S	l	l_1	l_2	L	L_1	b	B	Масса 100 шт. кг
6	4	11,0	MR14x1,5	9	MR10	7,6	10	12	9	7	24	17	31	2	5	1,62
8	6	13,0	MR16x1,5	11	MR12x1,5	9,6	12	14		8	25		32	7	2,32	
10	8	15,0	MR18x1,5	13	MR14x1,5	11,6	14	17		9	25	34	3	9	3,13	
12	10	17,0	MR20x1,5	15	MR16x1,5	13,6	16	19		10	27	18	37	4	10	3,94
14	12	19,0	MR22x1,5	17	MR20x1,5	17,6	20	22		11	10	29	20	39	13	4,88
16	14	21,0	MR24x1,5	19	MR22x1,5	19,6	22	24		12			31	23	41	5
18	16	24,0	MR27x1,5	22	MR24x1,5	21,6	24	24		12	31	25	45	6	17	7,14
20	18	27,0	MR30x1,5	24	MR27x1,5	24,6	27	27		12	33	27	50	6	18	7,89
22	20	29,0	MR33x1,5	26	MR30x1,5	27,6	30	30		12	34	32	54	8	22	9,16
25	23	32,0	MR36x1,5	29	MR33x1,5	30,6	33	30		13	14	34	32	54	8	22
28	26	35,0	MR39x1,5	32	MR36x1,5	33,6	36	32	15		35	33	56	9	25	15,41
30	28	35,5		34				36	36		28	17,62				
32	30	38,0	MR42x1,5	37	MR39x1,5	36,6	39	41	16		36	34	58	10	19,82	
34	32	41,0	MR45x1,5	39	MR42x1,5	39,6	42	41				35			21,40	
36	34	44,0	MR48x1,5	41	MR45x1,5	42,6	45	46	16		36	36	58	10	22,60	
38	36			43											46	24,39

ОСТ 110375-72 Стр. 3

