

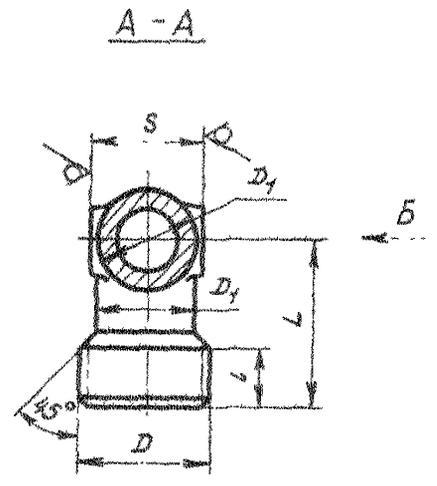


2. Конструкция и размеры проходных угольников должны соответствовать указанным на чертеже и в таблице.

Rz40/ ✓(✓)

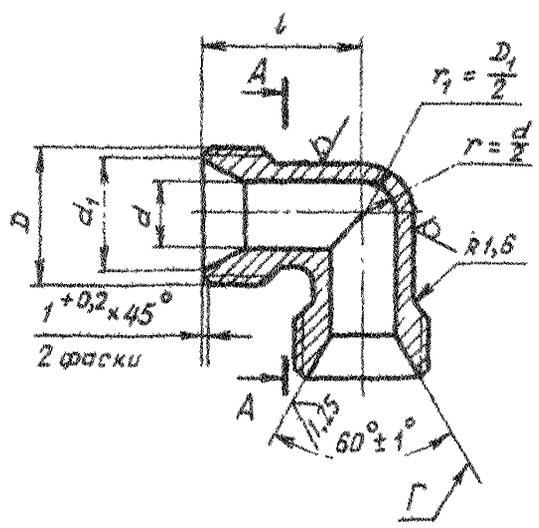

ВУД Б



№в. № дубляж	
№в. № оригинала	1081
Лит. №в.	2
№в. №в.	11776

Инв. № дубликата	
Инв. № подлинника	1081

Инт. изм.	2													
№ изв.	11776													

Размеры, мм

Наружный диаметр трубы D_H	d	d_1 $\pm 0,2$	D	D_1	S	b	L	B	Масса 100 шт., кг
6	4	11,0	MR14x1,5	9	12	9	21	5	1,45
8	6	13,0	MR16x1,5	11	14		22	7	1,96
10	8	15,0	MR18x1,5	13			24	9	2,93
12	10	17,0	MR20x1,5	15	17		25	10	2,88
14	12	19,0	MR22x1,5	17	19			13	3,61
16	14	21,0	MR24x1,5	19	22	11	28	15	4,41
18	16	24,0	MR27x1,5	22	24		30	17	5,94
20	18	27,0	MR30x1,5	24	27			18	6,36
22	20	29,0	MR33x1,5	26		12	33		7,60
25	23	32,0	MR36x1,5	29	30	13	36	22	9,91
28	26	35,0	MR39x1,5	32	32		38	25	13,00
30	28	35,5		34	36			28	15,10
32	30	38,0	MR42x1,5	37	41		40		16,86
34	32	41,0	MR45x1,5	39				30	19,09
36	34	44,0	MR48x1,5	41	46		42		20,08
38	36			43				23,25	
40	38	48,0	MR52x1,5	45	50		44	32	25,80
42	40			47				29,10	

ОСТ 1 10356-72 Стр. 3

